


TECHNICAL DATA SHEET



Phone: 516.294.1801
 Fax: 516.294.1828
 350 Thorens Avenue
 Garden City Park, NY 11040
 www.metropolitandoor.com


MODEL PFN FIRE RATED & NON-INSULATED ACCESS DOOR

INSTALLATION (WALL ONLY)

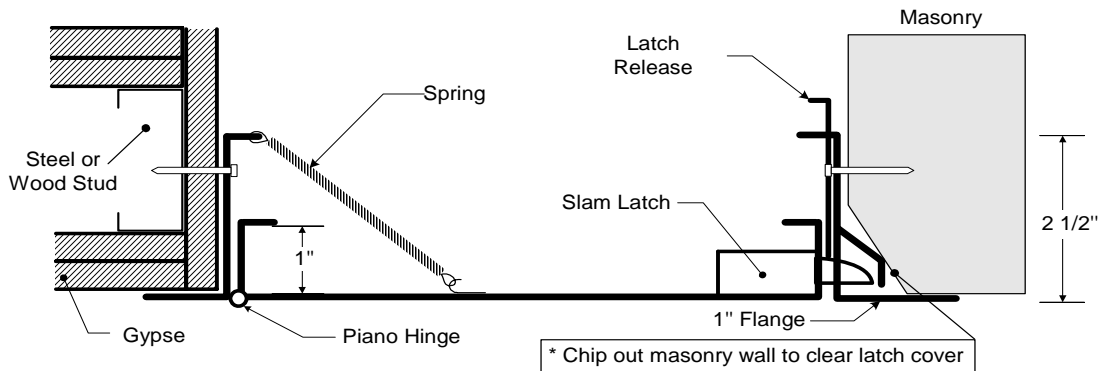

DIMENSION AND APPEARANCE

DOOR SIZE W x H (IN)	WALL OPENING (IN)	NUMBER OF LOCKS	SHIP WEIGHT (LBS) (KG)	
8 x 8	8 1/4 x 8 1/4	1	5	2.3
12 x 12	12 1/4 x 12 1/4	1	8	3.6
16 x 16	16 1/4 x 16 1/4	1	12	5.5
18 x 18	18 1/4 x 18 1/4	1	14	6.4
22 x 22	22 1/4 x 22 1/4	1	18	8.2
22 x 30	22 1/4 x 30 1/4	1	22	10
22 x 36	22 1/4 x 36 1/4	2	28	12.7
24 x 24	24 1/4 x 24 1/4	1	22	10
24 x 36	24 1/4 x 36 1/4	2	31	14.1
32 x 32	32 1/4 x 32 1/4	2	30	13.6
36 x 36	36 1/4 x 36 1/4	2	38	17.3

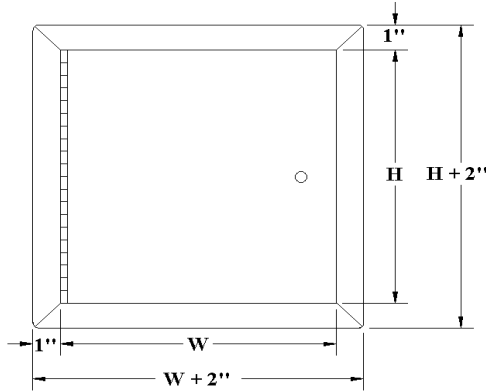

(Special sizes available upon request)

Max. size to maintain fire rating: 36" x 36".

DESCRIPTION AND MATERIAL SPECIFICATION

<p>Fire Rating: 2 hour fire barrier, 1 1/2 hour B label, <i>Warnock Hersey</i> file #: L-14031 in conformance with the following codes: UL10b, UL-555, ASTM E152, NFPA 252 and ULC-S104 MEA # 507-06-M</p> <p>Material: 16 gauge steel</p> <p>Hinge: continuous piano hinge allows opening to 165°</p> <p>Lock / latch: Self latching tool-key operated latch and/or ring operated latch, both included</p>	<p>Inside panel release: standard on all doors</p> <p>Automatic panel closer: standard on all doors</p> <p>Finish: phosphate dipped steel with <i>Sherwin-Williams</i> high quality grey powder coat primer</p> <p>Packaging: wrapped individually in a box</p> <p>Options:</p> <p>Material: stainless steel 304 #4 (brushed finish), white</p> <p>Lock / latch: cylinder lock and key, handle operated cam latch mortise preparation for cylinder lock (cylinder optional)</p>
---	--

FIRE RATING CERTIFICATION



PROJECT DATA

Project name :	Qty	W	H	# of locks	Finish
Architect :					
Dealer :					
Contractor :					
Location :					
Date :	Special instructions :				
Tagging Instructions :					

CUSTOMER APPROVAL:

DATE: